


PRICE COMPUTING
SCALES

G-325 series

scales without
printer
04



Dimensions

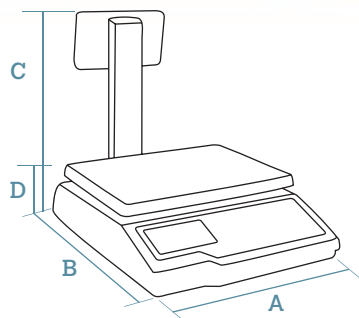

DATA IN mm

A	320
B	400
C	356
D	116

Plate dimensions: L305 x W235 mm.

Weight with packaging: 6 kg.



**LCD
SEGMENT
DISPLAY**



**UP TO
100 PLUs**



RS-232



**INTERNAL
RECHARGEABLE
BATTERY
OPTIONAL**



**METROLOGICAL
VERIFICATION
OPTIONAL (EU)**

Characteristics and functionality

Main characteristics

- Price computing electronic scale without printer.
- RS-232 interface: firmware and communication protocols upgradeable from PC.
- Internal rechargeable battery:
 - > Up to 120 hours of life with completely charged battery and back lighting disconnected (approximate data).
- Valid for legal metrology.

Features

- EAN heading programming (according to communication protocol).
- Tare, fix tare and manual zero.
- Fix price: to operate several times with the same article.
- Display of price in a secondary currency.
- Energy saving via programmable on and off back lighting switching and automatic disconnection.

Capacity / Accuracy

- Multi-range (3,000 divisions): 6 kg / 2 g - 15 kg / 5 g.
- Optional:
 - > Mono-range (3,000 divisions): 15 kg / 5 g.

Available formats

- Flat and pole in the same scale: the tower is included in the packaging and is easily installable.

Construction

- Structure:
 - > ABS plastic casing.
- Displays:
 - > 5 digits backlit LCD segment display in vendor and buyer side.
 - > Show weight, price / kg and total.
- Keypad with 32-keys.
- Plate:
 - > Type: flat.
 - > Material: stainless steel.

Communication to PC / POS / ECR

- RS-232 interface.
- Communication protocols available for the main POS and ECR in the market.
- Multi-protocol: communication protocol is selected in the scale (40 protocols available). More protocols can be added from PC by telecharge (maximum: 60 protocols more).
- "OP0S" driver.

Power supply

- Mains: 220 VAC with AC/DC 12 V / 500 mA adapter.
- 6 VDC / 4.5 Ah rechargeable internal battery available (only in G-325 B F/P) and connection to external battery.

Energy consumption

- G-325: 3 W (approx.).
- G-325 B: 3.5 W (approx.).

Models

	Displays	PLUs	Direct PLUs	Communication protocols	Power	Capacity / Accuracy	Reference
G-325 F / P	Segments LCD	100	9x2	Up to 100	Mains	6 kg / 2 g - 15 kg / 5 g	70321S00NE__
G-325 B F / P	Segments LCD	100	9x2	Up to 100	Mains / Battery	6 kg / 2 g - 15 kg / 5 g	70321S02NE__

(M) optional

Options

Option	Characteristics	Ref.
15 kg / 5 g - 30 kg / 10 g capacity	Multi-range (3,000 divisions).	...F__ (*)
Metrological verification (M)	Metrological verification (M), according to EU weighing directives. (See section on equipment metrological verification).	Consult

(*) The scale references with this capacity are obtained by replacing the last characters of the reference for the standard scale with the indicated ending.

Accessories

Italian plate

L357 x W235 x H55 mm.

The Italian plate is placed on the flat plate. A new weight adjustment might be necessary. Consult.

Ref: BCR71



Notes:

- The references correspond to standard models: Black ABS plastic casing, LCD segment display, flat stainless steel plate and RS-232 communications. Capacity / Accuracy: 6 kg / 2 g - 15 kg / 5 g.