


WEIGHT ONLY SCALES

# PS-65 CW series

scales without  
04 printer



## Dimensions

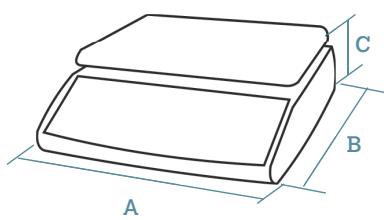

DATA IN mm

A	288
B	313
C	109


Plate dimensions:  
L263 x W204 mm.  
Packaging measures  
L345 x W370 x H195 mm.  
Weight with packaging: 4.1 kg.



CELY  
PS SERIES



LCD  
SEGMENT  
DISPLAY



INTERNAL  
RECHARGEABLE  
BATTERY

# Characteristics and functionality

## Main characteristics

- Weight only scale without printer, with checkweigher function: the display changes its colour (orange-green-red) and alarm.
- Internal rechargeable battery:
  - > Up to 60 hours' runtime with battery at full charge and backlight off (approximate data).

## Features

- Weight control.
- Weighing unit conversion (kg / g / lb / tl).
- Fix tare.
- Manual zero.
- Energy saving via programmable on and off back lighting switching and automatic disconnection.
- Operating temperature: 0 °C to + 40 °C.

## Capacity / Accuracy

- Mono-range (15,000 divisions):
  - > 3 kg / 0.2 g.
  - > 6 kg / 0.5 g.
  - > 15 kg / 1 g.
  - > 30 kg / 2 g.

## Models

### Cely PS-65 CW / 3

CAPACITY 3 kg / 0.2 g (mono-range)

Ref.: 71A0PS650032UE

### Cely PS-65 CW / 15

CAPACITY 15 kg / 1 g (mono-range)

Ref.: 71A0PS650034UE

#### Note:

- The references correspond to standard models: black ABS plastic casing, backlit LCD segment display and flat stainless steel plate. Capacity: mono-range, from 3 kg to 30 kg.

## Formats

- Flat.

## Construction

- Structure:
  - > ABS plastic casing.
- Display:
  - > Backlit LCD segment display (3 colours).
  - > 5 digits (H25 mm).
- Keypad with 2 keys under membrane.
- Plate:
  - > Type: flat.
  - > Material: stainless steel.

## Power supply

- Mains: AC 12 V / 500 mA adapter.
- Internal rechargeable battery Pb 6 V / 3.2 A.

## Energy consumption

- 1.1 W (approx.) with backlight activated.

### Cely PS-65 CW / 6

CAPACITY 6 kg / 0.5 g (mono-range)

Ref.: 71A0PS650033UE

### Cely PS-65 CW / 30

CAPACITY 30 kg / 2 g (mono-range)

Ref.: 71A0PS650035UE