

VC-50 M

SEGMENT
LCD
DISPLAYINTERNAL
RECHARGEABLE
BATTERYCONNECTABLE TO
PLATFORM UP TO
4 LOAD CELLSMETROLOGICAL
VERIFICATION
OPTIONAL (UE)

Features

- Weight-Tare-Accumulation.
- Piece counting.
- Checkweighing (minimum-maximum).

Weighing

- Connection to weighing platform of up to 4 load cells.
- Up to 6,000 divisions. Mono-range.

Construction

- Structure:
 - High-resistance ABS plastic.

- Console:
 - Display with 7-keys and backlit LCD display of 6 digits (24 mm).


Power supply

- AC adaptor (12 V / 500 mA).
- Internal rechargeable battery (6 V / 4 Ah) .
 - Up to 100 hours' runtime (depending on conditions of use).

Energy consumption

- 1.6 W (approx.) with backlight activated.

DIMENSIONS

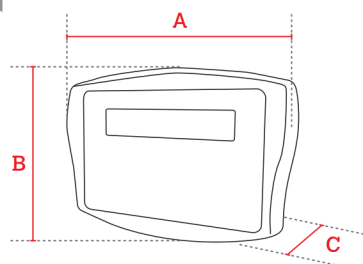

DATA IN mm

A	250
B	180
C	105

Weight with packaging: 2.5 kg.

MODEL:

VC-50 M

Ref.:
71AVC51M00UE

Options

Option	Characteristics	Ref.
Metrological verification (M)	According to EU weighing directives for indicator and platform assembly. (See section on Metrological verification).	Consult

Accessories



Iron column kit

H330 mm column
Ref: 495586AH660 mm column
Ref: 495588A